

2699 East CR 50 Tiffin. OH 44883 Tiffin Office: 419-618-3072 Fax: 419-443-0539 Huntsville Office: 937-539-0094 Fax 937-843-3079

hhenvironmental@yahoo.com



Asbestos Survey

260 Grove Ave; Lakeview, OH 43331

LUC Regional Planning Commission



2699 East CR 50 Tiffin. OH 44883 Tiffin Office: 419-618-3072 Fax: 419-443-0539 Huntsville Office: 937-539-0094 Fax 937-843-3079 hhenvironmental@yahoo.com

LUC Regional Planning Commision

10/27/23

10820 SR 347

East Liberty, OH 43319

Phone:937-666-3431

Email: heathermartin@lucplanning.com

Heather Martin

Asbestos survey: 260 Grove Ave; Lakeview, OH 43331

Heather,

H&H Environmental, LLC. has completed an inspection for asbestos-containing materials (ACM) at 260 Grove Ave; Lakeview, OH 43331. This inspection was performed by Tyler Rister (Certification # 35958) and Jace Hurt (Certification # 36450) on October 24th, 2023 in Lakeview, OH. Tyler Rister and Jace Hurt maintain a current Ohio EPA Asbestos Inspector Certifications. Proof of these certifications are attached.

Enclosed:

- 1. Asbestos Survey Cover
- 2. Asbestos Survey Letter
- 3. Purpose and Procedure
- 4. ACM Summary and Notice
- 5. Sample Chain-of-custody
- 6. Sample Site Pictures
- 7. Laboratory Analysis Report (and point-count analysis if applicable)
- 8. Asbestos Inspector Certifications

Purpose of Inspection:

The ACM inspection was conducted in accordance and observation of EPA NESHAP and OSHA regulations pertaining to the demolition/renovation of regulated structures. This inspection included all applicable and accessible areas of the structure.

Procedure:

The inspection, conducted on 10-24-2023, was completed utilizing applicable Federal and Ohio State regulations pertaining to asbestos: Federal OSHA (29 CFR 1910.1001and 29 CFR 1926.1101), EPA (40 CFR Part 61), and TSCA Title II AHERA/ASHARA (40 CFR Part 763) Asbestos Regulations. The findings in this report are consistent with accepted principles and practice established and prescribed by the EPA and AHERA.

All accessible areas of the building in Lakeview, OH were inspected physically, functional space by functional space, and homogeneous area by homogeneous area to determine the presence of asbestos-containing materials. Suspected asbestos-containing materials were grouped per homogeneous area. Suspect materials that may be present inside wall cavities, electrical wiring or which were otherwise inaccessible were not included in the scope of this inspection. Core samples of friable and non-friable suspect asbestos-containing materials were collected to be analyzed for asbestos content. Those materials considered to be non-suspect (concrete, wood, fiberglass, carpeting, metal, etc.) were not sampled for analysis. Each location for sample collection, chosen at random, were representative of the suspect materials. The bulk samples were placed in zip-lock bags, sealed, and labeled with an identifying code. The samples, along with the chain-of-custody, were then submitted to the laboratory, McCall and Spero Environmental, Inc., to be analyzed for asbestos content. A copy of the chain-of-custody is attached.

6 bulk samples of suspected ACM, were submitted to a laboratory for analysis using Polarized Light Microscopy. Laboratory results are attached.

Analytical Results:

H&H Sample # Lab Sample #	Homogenous Area	Layers	Description/ Sample Location	PLM Result
260-01 PO263HHE01	1	2	Linoleum (Tan) Rm.6 near Wall B	ND
260-02 PO263HHE02	1	2	Linoleum (Tan) Rm.6 near Wall A	ND
260-03 PO263HHE03	2	1	Asphalt Roofing debris outside Garage	ND
260-04 PO263HHE04	2	1	Asphalt Roofing debris outside Rm. 2	ND

Summary:

Based the analysis of suspected ACM samples, None of the samples of homogenous areas were determined to be asbestos-containing.

The approximate total of asbestos-containing materials are as follows:

None

Among the material noted above, the **None** of the material must be removed by a licensed asbestos abatement contractor prior to renovation or demolition if it would impact this material.

Under current Ohio standards materials containing less than 1% are not "asbestos containing material". However, this material is still regulated under OSHA and must adhere to wet handling, prompt cleanup, disposal requirements set forth by 29 CFR 1926 as applies to demolition operations involving materials containing less than 1% asbestos.

Notice:

An Ohio EPA Notification of Demolition and Renovation form must be completed and submitted to the Ohio EPA at least ten working days prior to the commencement of any abatement or demolition activity. The amount, type and condition of the asbestos-containing materials found in this inspection, as well as the materials assumed to be asbestos-containing materials, must be noted on the form. The name and certification number of the asbestos inspector must be included.

If any additional materials are encountered in these locations, these materials should be left intact and undisturbed until they can be inspected and and sampled by a licensed Asbestos Abatement Evaluation Specialist. H&H Environmental would be happy to return to the site if additional suspect materials are encountered during demolition activity. The other option is to assume that the material is asbestos-containing and have it abated as such.

This report, and the supporting findings, data, conclusions, and recommendations represents H&H Environmental's efforts on behalf of the client. This report is not an asbestos abatement specification and shouldn't be used for specifying removal techniques or methods. The assessments, conclusions, results, and recommendations stated in this report are representative of the circumstances and conditions observed by the inspector at the date of the inspection. We cannot assume responsibility for any change in conditions or circumstances that occurred after inspection. The findings in this report, if implemented by the client, should not be construed as as an assurance or implied warranty for the continuing safety, performance, or cost-effectiveness of any equipment, system, product, procedure, facility, or policy recommended or discussed herein.

The recommendations in this report are based on the professional judgment of the inspector and the results of the samples collected an analyzed. H&H Environmental makes no warranty, expressed or implied, and accepts no liability for the presence or absence of asbestos or other hazardous materials in or on home products, materials, and areas. H&H Environmental assumes no responsibility for the cost of repairing, removing, or replacing any undiscovered or unreported condition or defect, or any future condition or defect.

If you have any questions or concerns please feel free to contact H&H Environmental's Charles E. Hurt at 419-618-3072.

Thank you,

Tyler Rister

AHES # ES 35958

H&H Environmental

Jace Hurt Just


AHES # ES 36450

H&H Environmental

H&H Environmental			Asbestos Inspec	tion Work She
site 760 Garne Ave	City	Lokevra	_ State OH	Zip <u>43381</u>
Levels: 1 /2 3	Renovation	_ Demolition	CrawlBas	
Exterior: WoodVinyl	Aluminum A	snbalt Tran	Crawl Bas	Plack
nterior Walls: Drywall Plas	ster Paneling	Transite	Other	Diock
Vindows: WoodVinyl	Metal Other		Number	
looring: Wood Concrete_	9" Tile 1	2" Tile Lino	leum . Ceramie	
Ieating: FAFHot Water	Furnace Board	Duct Work	Seam Tape	Duct Boots
Roofing: AsphaltMetal	_Transite Bu	ild UpOthe	r_	
25"	1st Floor	-		
- A.	1st Floor	ſ	Α	2nd Floor
				×
F. W				
7.	` .			Į.
**				
2 N E E		i		
		P		1
. @	r.			İ
. 6 .	W P	D		В
56.		j		
2 4				
- 3				
				ŧ
90 //		L	C	
Ceiling Height 86	and the	c	Ceiling Height	·
Α	Basement		A	

D	В	D		
1	1			В
c			C	
spectorTyler Rister		Partification # EG	25050	1.1 1
A TANK INISION		Certification # ES	Date Date	16/25/23
				/

A#	Material	Room Location	Color	Condition	Quantity
<u>d/</u>	Linolium	4,6	Ton	F	132 SF
ł Z	Asphalt Restory	Rooting	Black	F	1,260 SF
-		_			
* 1006	A Closing ton 11 F = Fair P = Poor FR	= Friable NF = Non Frial	pie		
nes:	ery hours of Von	of Sidny & April	ell Reston	Building Clean	Oat: Yes / No
Linole	poor shape x FU	Viny Wordows ,	All Mors 6	re saggy/	Jeak pending
1 Ne	suspect heat sources				
71100	Tyler Rister		*	**************************************	16/25/23

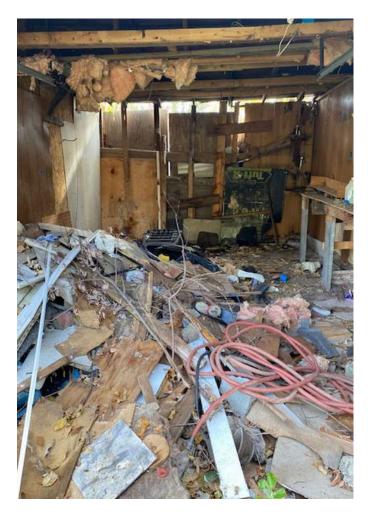
















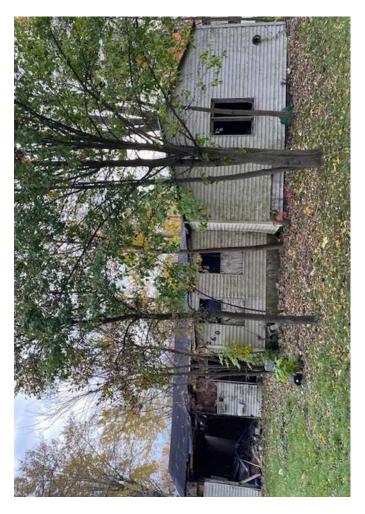









E-mail: customerservice@mselabs.com • Website: www.mselabs.com

Date: October 26, 2023

Attention: Chuck Hurt

H & H Environmental

Subject: Analysis of bulk samples for asbestos mineral fibers by Polarized Light

Microscopy (PLM) with Dispersion Staining (EPA/600/R-93/116)

RE: MSE-PO263HHE

260 Grove Ave; Lakeview, OH 43331 Project

Dear Mr. Hurt:

McCall & Spero Environmental, Inc. has completed the analysis of the bulk samples we received from your offices on October 26, 2023. These samples represent the bulk samples from the 260 Grove Ave; Lakeview, OH 43331 Project.

The PLM bulk analysis was performed according to the "Method of the Determination of Asbestos in Bulk Building Materials", R. L. Perkins and B. W. Harvey (EPA/600/R-93/116).

The results for the six (6) samples are summarized in the following report. Please note that for samples consisting of two or more distinct components, each component is analyzed and reported individually (EPA 40 CFR Part 61 [FRL-4821-71]).

Thank you for consulting McCall & Spero Environmental, Inc. Should you have any questions concerning these results, please contact our office.

Sincerely,

Kevin R. Bean, B.A. PLM Laboratory Director



SUMMARY OF PLM BULK ANALYSIS RESULTS

Page 1

Project Name: 260 Grove Ave; Lakeview, OH 43331 Project McCall & Spero Environmental Project No. MSE-PO263HHE

MSE # PO263HHE	SAMPLE # DESCRIPTION	ASBESTOS TYPE & %	OTHER FIBROUS MATERIAL & %	% NON-FIBROUS MATERIAL	COLOR
001 (A)	260-01 (A) Linoleum	ND	Cellulose / 20% Glass / 10%	70%	Tan
001 (B)	260-01 (B) Mastic	ND**	Cellulose / 5% Glass / 5%	90%	White
002 (A)	260-02 (A) Linoleum	ND	Cellulose / 20% Glass / 10%	70%	Tan
002 (B)	260-02 (B) Mastic	ND**	Cellulose / 5% Glass / 5%	90%	White
003	260-03 Asphalt Roofing	ND**	Cellulose / 10% Glass / 15%	75%	Black
004	260-03 Asphalt Roofing	ND**	Cellulose / 10% Glass / 15%	75%	Black

NOTES:

ND = None Detected CH = Chrysotile A = Amosite AC = Actinolite

CR = Crocidolite AN = Anthophyllite TR = Tremolite

For samples consisting of separate components, each component is analyzed and reported separately.

Results apply only to items tested. Quantification is accurate to within \pm 10%. Results from this report must not be reproduced, except in full, with the approval of McCall & Spero Environmental, Inc. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

** EPA recommends that bulk materials found negative for asbestos or less than one percent asbestos by polarized light microscopy that fall into one of five dominantly nonfriable categories be reanalyzed by an additional method, such as transmission electron microscopy. (EPA Notice of Advisory, FR Vol. 59, No. 146 & Test Method EPA 600/ R-93/116).

Analyst: Kevin R. Bean, B.A.



1831 Williamson Court • Suite 100 • Louisville, KY 40223 Phone (502) 244-7135 • (800) 841-0180 • FAX (502) 244-7136

E-mail: customerservice@mselabs.com • Website: www.mselabs.com

BULK SAMPLE CHAIN OF CUSTODY FORM

Company:	H&H Environmental Telephone # 4	119-618-3072 Fax #: 419-443-0	539
	Chuck Hurt	Client Project Number:	and the second s
Relinquished b	y: Tyler Rister	Date: /6/25/23 Time: 3	•••
\$0.	t To: _lke Hurt		
	260 Garage Ave Lakeview	OH 43331	
Turn-Around (Circle One): Same Day 24 Hour 2-3 D	Day 4-5 Day Weekend Rush A	fter Hour Rush
	ested (Circle One): PLM Buik Analysis T	EM Qualitative Analysis TEM Quantitative Ar	nalysis (4-5 Day)
For Laboratory			
ten a villa o el coesso de la cesso.	PODE3HITE	Method: EPA/600/R-93/116	
	ved by: 22	Date: 10/26/23 Time: 10	you
Client Sample Number	Location	Sample Description	Sampled By
760-01	Cincleum (Tan) from a near	wall B	
260.02	Construm (Ton) (com 6 news	Well A	
266-63	Asphelt King delies outs	she George	
260-04	Asphalt Kenting dibris outs	the four Z	
	,		
			,
-			
			1



Asbestos Building Inspector Refresher

Certificate

This is to certify

Tyler Rister

XXX-XX-1478



section 855.120 of Title 77. IDPH recognition based on student request. Refresher and has passed an examination in that course with a minimum score of 70% or better. Training was in accordance with 40 CFR Part 763 has attended and successfully completed the Asbestos Hazard Emergency Response Act mandatory course for the Asbestos Building Inspector Indiana requirements under 326 IAC 18-2 and Chapter 3745-22 Ohio Administrative Code, and the Illinois Department of Public Health (IDPH) under (AHERA). The above student received the requisite training for asbestos accreditation under Title II of the Toxic Substances Control Act and State of

Course Location	Examination Date	Date(s) of Course	Expiration Date	Training Manager
Columbus, OH	11/30/2022	11/30/22	11/30/23	Less St.

33150 Lakeland Blvd. Cleveland, OH 44095 www.TSltraining.com

Course Certificate No.

22 TSI 418145 ir

5

TRAINING SERVICES INTERNATIONAL

Asbestos Management Planner Refresher

Certificate

Thus is to certify

Tyler Rister

XXX-XX-1478



has attended and successfully completed the Asbestos Hazard Emergency Response Act mandatory course for the Asbestos Management Planner Refresher and has passed an examination in that course with a minimum score of 70% or better. Training was in accordance with 40 CFR Part 763 section 855.120 of Title 77. IDPH recognition based on student request. Indiana requirements under 326 IAC 18-2 and Chapter 3745-22 Ohio Administrative Code, and the Illinois Department of Public Health (IDPH) under (AHERA). The above student received the requisite training for asbestos accreditation under Title II of the Toxic Substances Control Act and State of

Course Location	Examination Date	Date(s) of Course	Expiration Date	Training Manager
Columbus, OH	11/30/2022	11/30/22	11/30/23	As Cal

33150 Lakeland Blvd. Cleveland, OH 44095 www.TStraining.com

Course Certificate No. 2

22 TSI 418151 mpr



Asbestos Contractor Supervisor Refresher

Certificate

This is to certify

Tyler Rister

XXX-XX-1478



has attended and successfully completed the Asbestos Hazard Emergency Response Act mandatory course for the Asbestos Contractor Supervisor section 855.120 of Title 77. IDPH recognition based on student request Indiana requirements under 326 IAC 18-2, Chapter 3745-22 Ohio Administrative Code, and the Illinois Department of Public Health (IDPH) under (AHERA). The above student received the requisite training for asbestos accreditation under Title II of the Toxic Substances Control Act, State of Refresher and has passed an examination in that course with a minimum score of 70% or better. Training was in accordance with 40 CFR Part 763

Training Manager

11/29/23 Expiration Date

11/29/22
Date(s) of Course

11/29/2022

Examination Date

Course Location

Columbus, OH

33150 Lakeland Blvd. Cleveland, OH 44095 www.TSltraining.com

Course Certificare No.

22 TSI 418032 csr



Asbestos Building Inspector Refresher

Certificate

This is to certify

lace Hurt

XXX-XX-0133



section 855.120 of Title 77. IDPH recognition based on student request. (AHERA). The above student received the requisite training for asbestos accreditation under Title II of the Toxic Substances Control Act and State of Indiana requirements under 326 IAC 18-2 and Chapter 3745-22 Ohio Administrative Code. and the Illinois Department of Public Health (IDPH) under Refresher and has passed an examination in that course with a minimum score of 70% or better. Training was in accordance with 40 CFR Part 763 has attended and successfully completed the Asbestos Hazard Emergency Response Act mandatory course for the Asbestos Building Inspector

-
)

11/30/23

11/30/22

11/30/2022

Columbus, OH

33150 Lakeland Blvd Training Manager

www.TSltraining.com Cleveland, OH 44095

Expiration Date

Date(s) of Course

Examination Date

Course Location

Course Certificate No.

22 TSI 418147 ir



Asbestos Management Planner Refresher

Certificate

This is to certify

Jace Hurt

XXX-XX-0133



Refresher and has passed an examination in that course with a minimum score of 70% or better. Training was in accordance with 40 CFR Part 763 (AHERA). The above student received the requisite training for asbestos accreditation under Title II of the Toxic Substances Control Act and State of Indiana requirements under 326 IAC 18-2 and Chapter 3745-22 Ohio Administrative Code, and the Illinois Department of Public Health (IDPH) under section 855.120 of Title 77. IDPH recognition based on student request. has attended and successfully completed the Asbestos Hazard Emergency Response Act mandatory course for the Asbestos Management Planner

Course Location	Examination Date	Date(s) of Course	Expiration Date	1 rairing Manager
				T-:-36
Columbus, OH	11/30/2022	11/30/22	11/30/23	Les Care

33150 Lakeland Blvd. Cleveland, OH 44095 www.TSltraining.com

Course Certificate No.

22 TSI 418153 mpr



Asbestos Contractor Supervisor Refresher

Certificate

This is to certify

Jace Hurt

XXX-XX-0133



has attended and successfully completed the Asbestos Hazard Ernergency Response Act mandatory course for the Asbestos Contractor Supervisor section 855.120 of Title 77. IDPH recognition based on student request. Refresher and has passed an examination in that course with a minimum score of 70% or better. Training was in accordance with 40 CFR Part 763 Indiana requirements under 326 IAC 18-2, Chapter 3745-22 Ohio Administrative Code, and the Illinois Department of Public Health (IDPH) under (AHERA). The above student received the requisite training for asbestos accreditation under Title II of the Toxic Substances Control Act, State of

	Train	Che Che
8	ino Manager	The state of the s
Expiration Date	Expiration Date	11/29/23
Date(s) of Course	Details as Comme	11/29/22
Examination Date		11/29/2022
Course Location		Columbus, OH

33150 Lakeland Blvd. Cleveland, OH 44095 vwww.TSltraining.com

Course Certificate No.

22 TSI 418034 csr